

tubs&tiles  
feel right at home



March 2021

# TILE ANCILLARY PRODUCTS TRADE GUIDE





## INDEX

### BAL

- 3 - Lifetime Guarantee
- Floor Drying Times
- Max Weight Capacity Chart
- BAL Adhesive Use Quick Guide

### Adhesive

- 4 BAL
- 7 - Techno Fix
- Dunlop

### Primer

- 8 - BAL
- Ardex

### Grout & Silicone

- 9 BAL

### Tanking

- 10 - BAL
- Ardex

### Uncoupling Mat

- 11 BAL Rapid Mat Uncoupling System

### Floor Leveller

- 11 Dunlop
- 12 - Ardex
- BAL

### 13 Lithofin Tile Care

### Undertile Heating Mat

- 14 Flexel Eco Floor Undertile Heating Mat

### Jackoboard

- 15 Construction Board
- 16 Showerboard

### Schluter

- 17 Shower Box
- 18 Tile Trims & Movement Profiles

### 19 Tile Levelling Kits, Tile Trims & Spacers

NOTES: Prices exclude VAT. Guide valid to 31st August 2021. Errors and Omissions Excepted (E & OE) Prices & information in this brochure are intended as a guide and are subject to change without notice. Price and product details will be confirmed in advance of purchase. Whilst we make every effort to provide you the most accurate, up-to-date information, inadvertently there may be information that contains typographical, photographic inaccuracies or omissions. Tubs & Tiles assumes no legal liability or responsibility for the accuracy or completeness of the information contained within this catalogue.



# BAL

BAL are the leading brand of professional tiling products that can be trusted for quality and lasting performance. When a BAL system installation is used we can offer you an unrivaled 25 Year Guarantee and total peace of mind that your investment will stand the tests of time.

## FIVE KEY QUESTIONS THAT SHOULD BE ASKED

1. What type of floor are you tiling?
2. Is there underfloor heating?
3. Is it a wet area?
4. Is it a new house or a refurbishment?
5. What type of wall are you tiling?
6. Do you want a BAL specialist Rep to call to your house?

## NEW FLOOR DRYING TIMES

Concrete - 6 weeks  
 Sand Cement - 3/4 weeks  
 Gypsum Screeds at 20 Degrees  
     - 1mm per day up to 40mm  
     - 1/2mm per day for 40mm  
 Cemfloor - 3 Weeks  
 BAL Quickset Cement - 24 Hours

## BAL TECHNICAL SUPPORT

Telephone: +353 (1) 880 9210

Technical Support Hotline:  
 Tom Crean +353 86-1422952  
 tom@ardexbuildingproducts.ie

Niall O Carroll +353 86-3801042  
 niall@ardexbuildingproducts.ie

MAXIMUM WEIGHT CAPACITY OF BACKGROUNDS			
Background	Maximum weight (kg/m <sup>2</sup> )	TYPICAL EQUIVALENT	
		Stone thickness	Tile thickness
Concrete or sound cement & sand render on strong background	- 64kg/m <sup>2</sup> (max slump resistance)	20mm	25mm
20mm tile backer board	60kg/m <sup>2</sup> (with 8 fixings per m <sup>2</sup> )	20mm	25mm
Paper faced plaster board	32kg/m <sup>2</sup>	10mm	12.5mm
Gypsum plaster	20kg/m <sup>2</sup>	7mm	8mm
Aquapanel	50kg/m <sup>2</sup>	17mm	20mm
Concrete & lightweight blockwork	32kg/m <sup>2</sup>	10mm	12.5mm
Brickwork	32kg/m <sup>2</sup>	10mm	12.5mm

\* Allow 4kg for adhesive per m<sup>2</sup>

ADHESIVES USAGE		
Tile Type	Floor	Wall
Budget Bathroom Ceramic Wall 25x50, 30x60cm		CTF4 / Flex 1
Floor Tiles 30x30, 45x45 & 60x60cm	Supercover Rapid Set* / Pourable One	
Extra Value Matt 45x45, 60x30, 60x60cm	Supercover Rapid Set* / Pourable One	60x60 Flex 1 CTF4
Matt Porcelain 60x60, 75x75, 60x120cm	Pourable One/Rapid Flex One	Max Flex Fibre -Flex 1
Polished Porcelain 60x60, 75x75, 60x120cm	Pourable One/Rapid Flex One	Max Flex Fibre -Flex 1
Glossy Porcelain 60x30, 60x60cm	Pourable One/Rapid Flex One	60x30cm CTF4 60x60cm- Max Flex Fibre / Flex 1
Budget Wood Effect 15x90, 23x120cm	Supercover Rapid Set* / Pourable One	
Wood Effect 15x90, 23x120cm	Pourable one /Rapid Flex One	
Splash Back - Ceramic & Porcelain Small Tiles		CTF4 /Flex 1



### SUITABLE FOR:

Budget Bathroom Wall - 25x50, 30x60  
Extra Value - 30x30, 45x45, 60x60  
Splash Back

## BAL CTF4

Tile Adhesive for Walls & Floors

### USE FOR:

- Most tile types, including porcelain
- Dry/wet – interior/exterior
- Including showers and swimming pools

### FEATURES & BENEFITS

- Non-slip
- Good bond strength
- Extended open time

**POT LIFE at 20°C:** 5 Hours

**GROUT AFTER:** 16 hours

**COLOUR:** White

**COVERAGE:** 4.75m<sup>2</sup> at 3mm

Code Description

U61390 BAL CTF4 20kg



### SUITABLE FOR:

Budget Bathroom - 25x50, 30x60, 60x60  
Extra Value Matt - 30x60, 45x45, 60x60  
Polished/Glossy Porcelain - 30x60, 60x60, 75x75  
Splash Back

## BAL FLEX ONE

Tile Adhesive for Walls & Floors

### USE FOR:

- Most tile types, including porcelain
- Dry/wet – interior/exterior
- Including showers, swimming pools and total immersion areas
- recommended for large format wall and floor tiles

### FEATURES & BENEFITS

- Highly flexible and deformable
- Use up to 15mm depth
- Excellent non-slump
- Ideal with large format tiles

**POT LIFE at 20°C:** 2.5 Hours

**GROUT AFTER:** 6-8 hours

**COLOUR:** White

**COVERAGE:** 5.3m<sup>2</sup> at 3mm

Code Description

U18052 Bal Flex One White 20Kg





#### SUITABLE FOR:

Tiles larger than 60x120

## BAL MAX FLEX FIBRE ADHESIVE

Tile Adhesive For Floors & Walls

#### USE FOR:

- Most large tile types (including porcelain) and uneven surfaces.
- Dry/wet – interior/exterior
- Including swimming pools

#### FEATURES & BENEFITS

- Excellent non-slip and bond strength
- Excellent application
- Highly flexible
- Extended open time (over 30 mins)
- Water/frost-resistant
- Suitable for swimming pools
- Grout after 16 hours

**POT LIFE at 20°C:** 5 minutes

**GROUT AFTER:** 16 hours

**COLOUR:** White, Grey

**COVERAGE:** 4m<sup>2</sup> at 3mm

Code	Description
U71890	White Max-Flex Fibre 20kg



#### SUITABLE FOR:

Budget Bathroom Floor - 30x30, 30x60, 45x45, 60x60

Extra Value - 30x30, 45x45, 60x60

Budget Wood Effect - 15x90, 23x120

## BAL SUPERCOVER 15KG

Rapid-setting Tile Adhesive for Walls & Floors

#### USE FOR:

- Most tile types, including porcelain
- Dry/wet – interior/exterior
- Including showers
- Floor tiles without underfloor heating

#### FEATURES & BENEFITS

- Goes 60% further per kg (vs standard adhesive coverage)
- Easier application/workability
- Highly water/frost-resistant
- Excellent bond strength

**POT LIFE at 20°C:** 45 minutes

**GROUT AFTER:** 2 hours

**COLOUR:** Grey

**COVERAGE:** 6m<sup>2</sup> at 3mm

Code	Description
U34792	Supercover Rapidset 15kg



#### SUITABLE FOR:

Budget Floor - 30x30, 45x45, 60x60  
Extra Value Matt - 45x45, 60x30, 60x60  
Matt Porcelain - 60x60, 75x75, 60x120  
Polished Porcelain - 60x60, 75x75  
Glossy Porcelain - 60x30, 60x60  
Wood Effect - 15x90, 23x120

## BAL POURABLE ONE

Flexible And Rapid-Setting Pourable Tile Adhesive For Floors.

#### USE FOR:

- Most large tile types (including porcelain) and uneven surfaces.
- Dry/wet – interior/exterior
- Including swimming pool bases and wet room floors

#### FEATURES & BENEFITS

- For fixing large format floor tiles
- Rapid-setting in three hours and highly flexible, it can be used up to 25mm bed thickness in one application
- BAL Pourable One is ideal for underfloor and undertile heating, areas of total immersion, heated screeds and installations subject to limited movement and vibration.

**POT LIFE at 20°C:** 45 minutes

**GROUT AFTER:** 3 hours

**COLOUR:** White

**COVERAGE:** 5.2m<sup>2</sup> at 3mm

Code	Description
U91115	BAL POURABLE ONE



#### SUITABLE FOR:

Matt Porcelain - 60x60, 75x75, 60x120  
Polished Porcelain - 60x60, 75x75  
Glossy Porcelain - 60x30, 60x60  
Wood effect - 15x90, 23x120

## BAL RAPID FLEX ONE

High Performance, Rapid Setting Flexible Adhesive

#### USE FOR:

- Most tile types, including porcelain, natural stone, rigid foam - insulating materials and brick slips
- Suitable for most substrates or backgrounds, including those with limited movement and vibration and for underfloor heating
- Dry/wet - interior/exterior including showers, swimming pools and total immersion areas

#### FEATURES & BENEFITS

- Enhanced with BAL Fibre Strand Technology (FST) for improved flexibility and strength
- Smoother consistency for easier mixing and application
- An extended pot life of 60 minutes allows applications of adhesive to larger areas for easier tile adjustment and reduced installation time

**POT LIFE at 20°C:** 60 Hours

**GROUT AFTER:** 3 hours

**COLOUR:** White

**COVERAGE:** 4m<sup>2</sup> at 3mm

Code	Description
U91116	Rapid-Flex One 20kg

## TECHNO FIX STANDARD SET



Floor & Wall Tile Adhesive

**COVERAGE:** 4m<sup>2</sup> at 3mm

**10 YEAR  
GUARANTEE**

Code Description  
U42945 White 20kg

## DUNLOP STANDARD SET



Floor & Wall Tile Adhesive

**COVERAGE:** 4m<sup>2</sup> at 3mm

**10 YEAR  
GUARANTEE**

Code Description  
U45834 D White 20Kg

## TECHNO FIX FAST SET FLEXIBLE



Flexible And Rapid-Setting  
Pourable Tile Adhesive For Floors

**COVERAGE:** 4m<sup>2</sup> at 3mm

**10 YEAR  
GUARANTEE**

Code Description  
U44891 Grey 20kgs  
U47817 White 20kg

## DUNLOP FAST SET FLEXIBLE



Flexible And Rapid-Setting  
Pourable Tile Adhesive For Floors

**COVERAGE:** 4m<sup>2</sup> at 3mm

**10 YEAR  
GUARANTEE**

Code Description  
U44777 Grey 20kg  
U36908 White 20kg

## TECHNO FIX LARGE FORMAT



Large Format Floor Tile Adhesive

**COVERAGE:** 4m<sup>2</sup> at 3mm

**10 YEAR  
GUARANTEE**

Code Description  
U21539 Grey 20kg

## DUNLOP LARGE FORMAT



Large Format Floor Tile Adhesive

**COVERAGE:** 4m<sup>2</sup> at 3mm

**10 YEAR  
GUARANTEE**

Code Description  
U36309 Grey 20kg

## TECHNO FIX FAST SET



Rapid-Setting Tile Adhesive For  
Ceramic Wall & Floors

**COVERAGE:** 4m<sup>2</sup> at 3mm

**10 YEAR  
GUARANTEE**

Code Description  
U20556 Grey 20kg



## BAL PRIME APD

Acrylic Primer for Walls & Floors

### USE FOR:

- Preparing floor and wall backgrounds prior to fixing of ceramic, mosaic and natural stone tiles
- Dry/wet – interior/exterior
- Porous Substrates e.g. plaster, timber, cement, concrete

### FEATURES & BENEFITS

- Stabilises dusty tiling substrates
- Reduces background porosity

### Use Undiluted On:


- Plaster walls/plasterboard when using a BAL cementitious powder adhesive
- Tongue & groove floorboards
- Anhydrite screed floors

### Use Diluted 1:1 With Clean Water On:

- Dusty/porous plaster walls when using a BAL ready-mixed adhesive
- Cement: sand screed/concrete floors

**MAY BE TILED AFTER:** 30 minutes

Code Description  
U21405 Prime ADP 2.5Litre

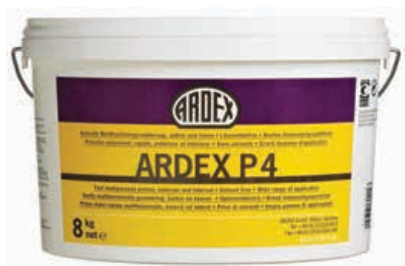

## ARDEX P4 PRIMER

Ready Mixed Rapid Drying Multi-Purpose Primer

### USE FOR:

Consistency which virtually eliminate drips and splashes so ideal for use on walls, floors and ceilings

### FEATURES & BENEFITS

ARDEX P 4 Primer is a ready mixed, rapid drying, solvent free primer, that dries in as little as 30 minutes and produces a textured surface 'grip'.

- Dries in 30-60 minutes
- Produces a textured surface 'grip'
- Can be diluted for improved coverage
- Easy Application, no mess, consistency eliminates drips and splashes
- White pigment allows clear identification of primed areas
- Solvent free

Code Description  
U57776 Ardex P4 Primer 2kg  
U32244 Ardex P4 Primer 8kg





Grout Colours



POT LIFE AT 20°C: 30 minutes

SETS IN: 2-3 hours

## BAL MIRCROMAX2

Wall & Floor Grout for Joints 1mm to 20mm

### USE FOR:

- Walls and floors
- Most tile types, including porcelain
- Suitable for most substrates including under tile heating and joints as narrow as 1mm or as wide as 20mm
- Dry or wet areas, interior or exterior Including power showers and wet rooms (NOT swimming pools or food preparation or storage areas)

### Code Description

U61393	White 2.5kg
U61402	White 5kg
U61411	White 10kg
U61398	Gunmetal 2.5kg
U61407	Gunmetal 5kg
U61413	Gunmetal 10kg
U61400	Pebble 2.5kg
U61409	Pebble 5kg
U61415	Pebble 10kg
U61401	Smoke 2.5kg
U61410	Smoke 5kg
U61416	Smoke 10kg

### FEATURES & BENEFITS

- Provides enduring good looks and consistent colour
- **Built-in Microban® antimicrobial protection. Stops the growth of bacteria and unsightly black mould**
- NEW super fine formulation
- Strong and flexible to avoid shrinkage, slumping or cracking
- Efflorescence free/ water-repellent
- Water/frost-resistant

### Code Description

U20125	Mahogany 2.5kg
U20127	Walnut 2.5kg
U20128	Hazel 2.5kg
U20132	Storm Grey 2.5kg
U20133	Dovetail 2.5kg
U20134	Taupe Grey 2.5kg
U20138	Mahogany 5kg
U20139	Walnut 5kg
U20140	Hazel 5kg
U20143	Storm Grey 5kg
U20144	Dovetail 5kg
U20145	Taupe Grey 5kg

## BAL MIRCROMAX SILICONE SEALANT

Anti-Mould Silicone Sealant for Walls & Floors

### USE FOR:

- Sealing movement joints
- Protecting against bacteria and black mould
- Most surface types, including acrylic, ceramic, fibreglass, glass, glazed, painted
- Dry/wet – interior/exterior

### FEATURES & BENEFITS

- Colour co-ordinated with Micromax2 grout
- Waterproof and weatherproof
- Excellent adhesion
- Service temperature range: -50°C to +200°C
- Contains Microban® antimicrobial protection: for extra hygiene



CURES IN: 24 hours (per 3mm thickness)

### Code Description

U33695	Silicone Gunmetal 310ml
U33697	Silicone Pebble 310ml
U33698	Silicone Smoke 310ml
U61420	Sealant White 310ml
U20146	Sealant Dove tail 310ml
U20147	Sealant Hazel 310ml
U20148	Sealant Mahogany 310ml
U20149	Sealant Storm Grey 310m
U20150	Sealant Taupe Grey 310ml
U20152	Sealant Walnut 310ml



**25** **BAL**  
GUARANTEED

### BAL TANK-IT

Total Waterproof Protection for Walls and Floors

#### USE FOR:

- will fully seal walls and floors of total immersion areas such as pools, fountains, spas, balconies and terraces (approved design required)
- Suitable for internal and external tiling
- Ideal for power showers, wet rooms

#### FEATURES & BENEFITS

- Simple, easy to apply two-part mix
- Total waterproof protection
- Easy to use it can be applied simply using a standard notched trowel, brush or roller
- Rapid-setting; allows tiling in 90 minutes
- No priming or matting is required
- EN Classification BS EN 14891

**MAY BE TILED AFTER:** 90 minutes

**COLOUR:** Grey

Code	Description
U72514	Tank-It Powder 5kg
U72515	Tank-It Liquid 5Ltr
U72516	Tank It Tape 5x200cm



**25** **BAL**  
GUARANTEED

### BAL TANKING KIT

The Complete Waterproofing System

#### USE FOR:

- Wet – interior, showers, wet rooms, laundry and utility rooms
- Around drainage channels, upstands, pipes and floor wastes
- Industrial, commercial and domestic

#### FEATURES & BENEFITS

- Flexible
- Waterproof/seamless: sets in 24 hours
- Supports maximum weight of 32kg/m on walls

**NOTE:** Not suitable for exterior use or total immersion

**MAY BE TILED AFTER:** 24 hours

Code	Description
U39812	BAL WP1 Tanking Shower Kit 5kg



### ARDEX WPC TANKING KIT

Flexible Rapid Setting and Drying Waterproof Protection System


#### USE FOR:

- Domestic and commercial installations
- Wet – interior, showers, wet rooms, laundry and utility rooms
- Can also be mixed to a slump consistency to fill gaps and plug holes

#### FEATURES & BENEFITS

- Rapid setting & drying tile after 90mins
- Simple to apply with a roller, paint brush or trowel
- 15 year product guarantee

Code	Description
U62235	Waterproof Tanking - 10kg Quick Dry Option

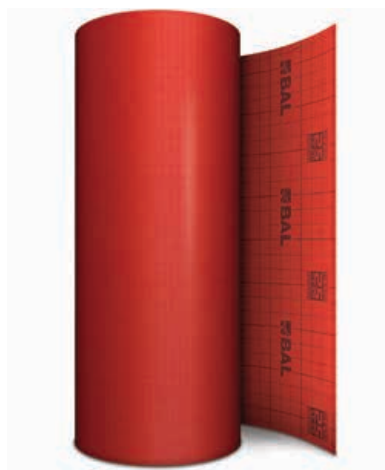

### BAL RAPID MAT UNCOUPLING SYSTEM

Uncoupling Matting for Fast Track Tiling onto Problematic Floors

#### USE FOR:


- Suitable for timber floors, new screeds and floors with under-tile heating systems
- Suitable for most tile types including mosaics
- **Uses over 20% less adhesive than matting systems with cavities**
- Highly engineered, lightweight matting
- Minimal loss of loading capacity making it suitable for medium/heavy duty commercial and domestic projects

**MAY BE TILED:** Immediately

#### FEATURES & BENEFITS

- The two matting layers and structured filament are highly engineered to absorb the lateral movement stresses.
- Under extreme movement, the bottom fleece layer can uncouple from the filament and move independently to prevent the stresses passing through to the tiling, to avoid tile failures.

Code	Description
U61936	Rapid Mat 1m x 30m

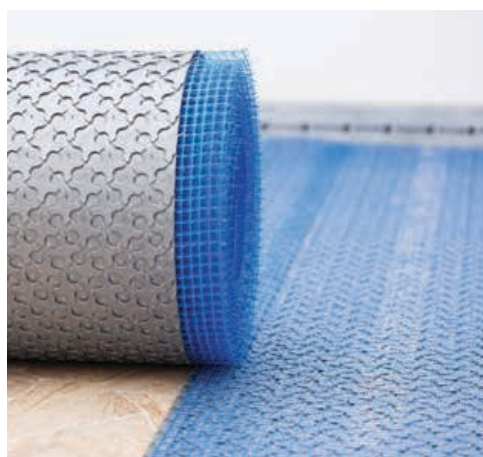

### FLEXBONE 2EASY ROLL

Flexbone 2Easy is a unique floating uncoupling matt where no adhesive is needed underneath

#### FEATURES & BENEFITS

- Large format ceramic, porcelain, natural stone, slabs with minimum edge length of 200mm
- Protecting existing floor coverings i.e sensitive heritage background
- Unprepared internal floor substrates – provided they are flat
- Counteracting tension stresses between substrate and tiled surface
- Light trafficked commercial areas
- Heated floors, timber floors, existing load bearing floor surfaces.

**MAY BE TILED:** Immediately

Code	Description
U15842	Gutjahr Flexbone-2 Easy Roll 20m x 1m

### FLEXBONE VARIED

Flexbone Varied is a high load-bearing, waterproof, uncoupling membrane.

#### FEATURES & BENEFITS

- Counteracting & minimising tension stresses between substrate & floor to be tiled
- Prevents reflective cracking caused by shrinkage cracks, board joints and lateral movement
- Installation of large format ceramic, porcelain, slabs and natural stone tiles with minimum edge length of 100mm
- Crack bridging and allowing safe installation on challenging substrates
- Internal flooring in high traffic areas in domestic and commercial areas
- Heated screeds, new cement screeds, timber floors and existing floor surfaces
- Waterproofing wet areas – no tanking needed.

**MAY BE TILED:** Immediately

Code	Description
U15841	Gutjahr Flexbone Roll 20m x 1m



**10 YEAR  
GUARANTEE**



## DUNLOP LX-40 FLOOR LEVELLER

### USE FOR:

- A single-part floor leveller with built-in polymer for smoothing concrete floors
- interior floors in dry areas prior to laying decorative floor coverings.
- It can be used on concrete, cement sand screeds, terrazzo, quarry tiles and old but sound adhesive residues.

### FEATURES & BENEFITS

- A single part floor leveller for smoothing concrete floors, LX-40 Floor Leveller smooths from 2-12mm and is perfect for levelling uneven floors prior to the laying of tiles or soft floor coverings.
- Self-levelling
- Foot traffic in 4 hours

**COVERAGE:** 4m<sup>2</sup> at 3mm thick

Code Description  
U85061 Dunlop Lx-40 Floor Leveller 20kg



**10 YEAR  
GUARANTEE**



## ARDEX SMOOTHING COMPOUND

High Build Rapid Drying Sub-Floor Levelling and Smoothing Compound

### USE FOR:

ARDEX water-based products provide excellent levelling and self-smoothing, with rapid setting, hardening and drying properties, that enable the rapid installation of a smooth sub-floor prior to application of the final floorcovering. Suitable for underfloor heating.

### FEATURES & BENEFITS

- Dries in cold conditions
- Number one commercial leveller
- cost savings on sub-floors with greater application thicknesses of up to 35mm
- Rapid hardening – walkable in approximately 2 hours
- Ceramic floor tiles after 4 hours
- Strong, high compressive strength

**MAY BE TILED AFTER:** 4 Hours

**COVERAGE:** 5m<sup>2</sup> at 3mm thick

Code Description  
U84850 Ardex K 15-Hb Smoothing Compound Grey 25kg



**25  
GUARANTEE BAL**



## BAL LEVEL MAX

High Performance, All-in-One Leveller with FST

### USE FOR:

- Preparing floors for tiling
- Most substrates
- Dry/wet – interior
- Suitable for timber floors at 3mm
- Suitable for use with Under Floor Heating

### FEATURES & BENEFITS

- Fibre Strand Technology (FST) for added flexibility & strength
- Self-smoothing capability, low shrinkage and a protein free formulation
- BAL Level Max has a maximum bed depth up to 80mm in a single application – the largest in the market
- accepts foot traffic in three hours and can be tiled after only four hours at any depth

**MAY BE TILED:** 4 Hours

**COVERAGE:** 5m<sup>2</sup> at 3mm

Code Description  
U72517 BAL Level Max Grey 25kg





### BAL LEVEL FAST

Rapid-Setting Floor Levelling Compound

#### USE FOR:

BAL Level Fast Levelling Compound is a fast-setting, high performance single part polymer-modified, shrinkage-compensated, protein-free, fibre cementitious leveller for floors. It sets in 30 minutes at 20°C, and can receive ceramic or natural stone tiles after 45 minutes at 20°C. Allow a minimum of 24 hours for wood flooring.

#### FEATURES & BENEFITS

- Anti-shrinkage technology
- 10 minutes wet edge
- 10 minutes pot life
- One pour easy application
- Walk on after 30min
- Fibre reinforced


**MAY BE TILED AFTER:** 45 Minutes

**COVERAGE:** 4m<sup>2</sup> at 3mm thick



Code Description

U29787 Bal Level Fast Rapid Levelling Grey 20kg

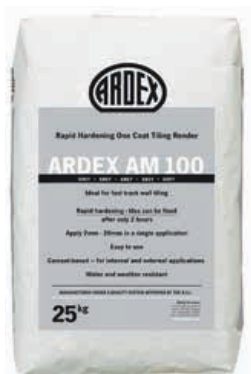

### ARDEX AM 100 WALL LEVELLER

Rapid Hardening One Coat Tiling Render

#### USE FOR:

Specially formulated pre-blended cement/sand render, requiring only the addition of water to produce a slump free mortar which can be applied from 2-20mm, and is ready to receive wall tiling only 2 hours after application.

#### FEATURES & BENEFITS

- Ideal for fast track wall tiling
- Rapid hardening – tiles can be fixed after only 2 hours
- Apply from 2-20mm in a single application
- Easy to use
- For internal and external applications
- Water and weather resistant

**COVERAGE:** 3.2m<sup>2</sup> at 6mm thick



Code Description

U63824 Ardex Am 100 Rapid Hardening Tiling Render 25kg



### LITHOFIN CEMENT RESIDUE REMOVER

#### USE FOR:

Designed for indoor use on ceramic surfaces such as fully vitrified tiles, quarry tiles, clay pavers, etc. Effortlessly removes cement and mortar residues, rust, lime, efflorescence and other hardened dirt layers.

#### FEATURES & BENEFITS

- concentrate
- acid based
- strong effect
- hardly any odour

**COVERAGE:** approx. 15 to 30 m<sup>2</sup> per litre

Code	Description
U61257	Lithofin KF Cement Residue Remover 1 Ltr



### LITHOFIN INTENSIVE CLEANER

#### USE FOR:

For occasional thorough cleaning or for regular cleaning of floors subjected to heavy wear. Removes stubborn dirt, oil and grease. Suitable for all ceramic finishes.

#### FEATURES & BENEFITS

- for indoor and outdoor use
- concentrate
- extra strong
- alkaline
- highly active

**COVERAGE:** approx. 10 to 15 m<sup>2</sup> per litre, up to 100m<sup>2</sup> when used for maintenance cleaning

Code	Description
U56958	Lithofin FZ Intensive Cleaner 1 Ltr



### LITHOFIN CONDITIONING CLEANER

#### USE FOR:



Used for continuous care of floors subjected to normal levels of wear. Cleans and maintains rough and polished surfaces streak-free making them even more attractive.

#### FEATURES & BENEFITS

- concentrate - very high yield
- free of wax
- mildly alkaline
- does not form any layers

**USAGE:** approx. 20ml per 10 liters of water

Code	Description
U57019	Lithofin Conditioning Cleaner 1 Ltr

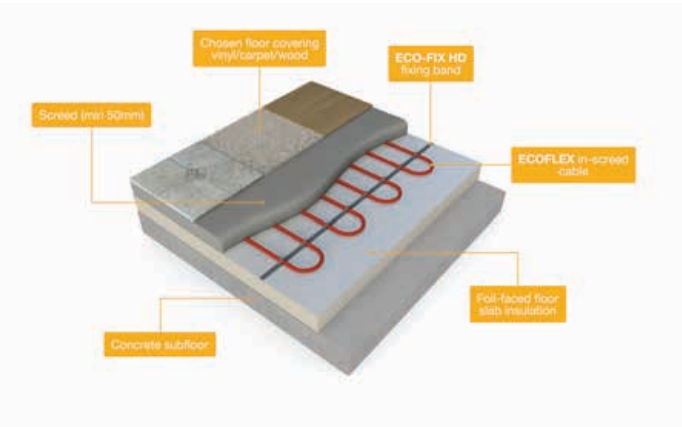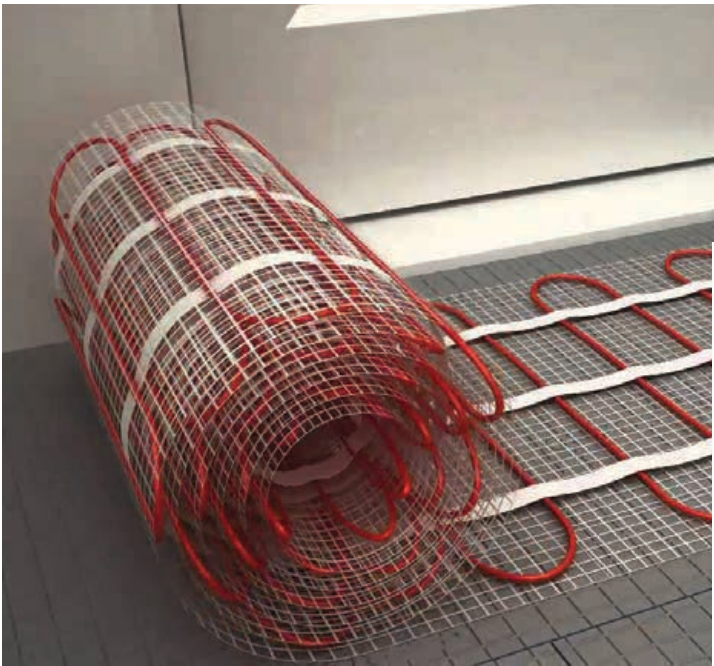

FLEXEL ECO FLOOR MATS

ECOFLOOR electric underfloor heating mats are made of a heating cable attached to a fibreglass mesh. The mat can simply be rolled out onto the floor, making installation quick and easy. The mats come complete with double sided tape on the underside so they can easily be fixed to any clean surface.

Great way to heat any tile floor. Suitable for kitchens, conservatory bathrooms and ensuites 150 watts per m².

FEATURES & BENEFITS

- Ideal for heating all types of tiled floors.
- Highly efficient when fitted on Jackoboard
- Quick installation
- Suitable for slate, tile, stone and marble floor finishes low build height
- Suitable for use in wet areas
- Continuous metallic earth screen to ensure electrical safety

HEATING MATS

Code	Description	Hourly running cost only	Output Watts per m²
U67081	0.5m	1c	75
U67086	1m	3c	150
U67090	1.5m	4.5c	225
U67091	2m	6c	300
U67098	2.5m	7.5c	375
U67099	3m	9c	450
U67102	3.5m	10.5c	525
U67103	4m	12c	600
U67104	5m	15c	750
U67105	6m	18c	900
U67108	7m	21c	1050
U67109	8m	24c	1200
U67110	9m	27c	1350
U67111	10m	30c	1500
U67113	11m	33c	1650
U67114	12m	36c	1800

THERMOSTAT

Code	Description
U67116	Redwing Manual Thermostat On/off temperature control for heating mats
U67119	Redwing Touchscreen Thermostat Easy to operate touchscreen digital timer/thermostat for use with heating mats
U18928	Redwing Wifi Thermostat
U18929	Redwing Touchscreen Thermostat Black



### JACKOBOARD

The construction board system for creative bathroom design. Made from an extruded polystyrene foam, JACKOBOARD construction boards are water-repellent and easy to work with. Finished on both sides with a special coating, they are ready to be tiled, rendered or plastered. Their excellent thermal insulation properties make them ideal for use as effective thermal insulation. The construction boards are perfectly suited for interior construction and furnishings – especially in rooms subject to high moisture levels.

### FEATURES & BENEFITS

- Made from extruded polystyrene foam
- Water-repellent
- With special coating on both sides
- Low weight, approx. 3–6 kg/m<sup>2</sup>
- Excellent thermal insulation properties
- High compressive strength » 300 kPa
- For rooms subject to high moisture levels
- Easy to work with
- Can be covered directly with tiles, render or plaster
- Can be cut to any dimension
- Can be installed on nearly any substrate

#### JACKOBOARD

Code	Description
U66994	1200 x 600mm thickness 6mm
U66995	1200 x 600mm thickness 10mm
U66996	1200 x 600mm thickness 12mm
U66997	1200 x 600mm thickness 20mm
U66998	1200 x 600mm thickness 30mm

#### ACCESSORIES

Code	Description
U67055	36mm Washer Circular (100pcs)
U67056	Self Adhesive 80mm Waterproof Tape (20mtr)





### SHOWERBOARD

Ideal for level access showering on suspended timber floors and wetroom shower areas.

They have a water-repellent core made of extruded polystyrene foam (XPS) and an extremely low installation height with an incorporated drainage fall. They also feature a special coating on both sides that permits direct tiling without the need for additional preparatory work.

#### SHOWERBOARD

Code	Description
U67008	900 x 900mm Centre Drain 20mm
U67010	1200 x 900mm Centre Drain 20mm
U67011	1200 x 1200mm Centre Drain 20mm
U67037	1300 x 800mm Offset Drain 20mm
U67038	1500 x 800mm Offset Drain 25mm
U67039	1800 x 900mm Offset Drain 25mm
OTHER SIZES AVAILABLE	

#### WASTE KITS

Code	Description
U67042	Jacko Shower Drain Horizontal
U67044	Jacko Shower Drain Vertical

#### FEATURES & BENEFITS

- Made of extruded polystyrene foam
- Water-repellent
- With special coating on both sides
- Tiles can be applied directly
- Integral CNC machines drainage fall
- Thicknesses: 20 or 25mm
- Excellent thermal insulation properties
- Drainage flow rate » 0.9 l/s
- Wheelchair-accessible
- Compressive strength » 300 kPa
- Different drain systems with a selection of individual positions, including solid stainless steel grate
- Sealed drain flange
- Ideal for level access wetrooms, wheelchair-accessible showers on suspended timber floors

### SCHLUTER SHOWER BOX

Pre-fabricated niches that are fully sealed, quick to install, ready to tile so you can easily add a touch of luxury to your wetroom, bathroom or en-suite with subtle design features such as integrated shelving. All niches include a pre-cut collar to make perimeter sealing simple. The larger niche sizes include a shelf insert that can be installed at any height to create separate compartments.

#### SCHLUTER INSET BOX

Code	Description
U09245	Small 305 x 152 x 89mm
U09246	Medium 305 x 305 x 89mm

#### SCHLUTER INSET BOX WITH SHELF INSERT

Code	Description
U09247	Large 305 x 508 x 89mm
U09248	Extra Large 305 x 711 x 89mm



### SCHLUTER COLOURED TILE TRIMS

Decorative metal profiles to finish and protect tile wall corners and other tiled edges e.g. tiled skirting. The integrated skirting creates a channel for grouting the tile

#### SCHLUTER 10mm SQUARE EDGE TRIM

Code	Description
U09241	Textured Ivory
U09242	Textured Cream
U09243	Textured Beige Grey
U09244	Textured Black



### SCHLUTER MOVEMENT PROFILES

Schluter movement joint profiles have side sections of rigid recycled plastic while the movement zone consists of soft CPR and creates the 5mm or 10mm wide visual surface.

Schluter movement joint profiles have edge protection consisting of lateral anchoring legs made of aluminium or stainless steel which are connected to a replaceable movement zone made of soft rubber.

#### 5mm EXPANSION JOINT

Code	Description
U09249	Pro Grey PVC 2.5m
U11350	Pastel Grey PVC 2.5m


#### 10mm EXPANSION JOINT

Code	Description
U09251	Grey PVC 2.5m
U09252	Pastel Grey PVC 2.5m
U09253	Aluminium 2.5m

#### Aluminium

Code	Description
U09254	T Bar 14mm Aluminium 2.5m
U11343	T Bar 25mm Aluminium 2.5m

U09256 Variable height finish Aluminium pro 2.5m

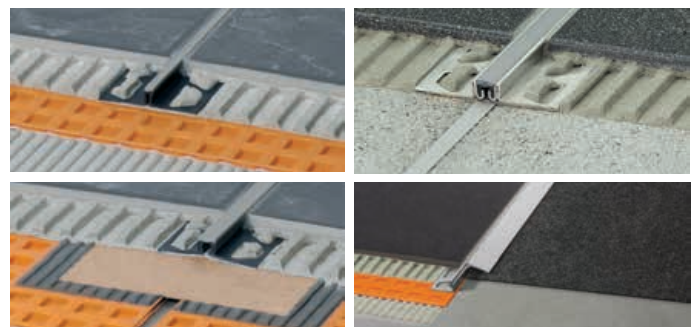

### HYDROHALT

HydroHALT is an advanced shower tray and bath upstand sealing system that is innovative in design but traditional in its use of proven materials and best practice installation methods.

Code	Description
U21996	Plumbud Sealing Kit 2.0m
U21997	Plumbud Sealing Kit 2.5m
U21998	Plumbud Sealing Kit 3.2m
U21999	Plumbud Sealing Kit 3.8m
U22001	Tilebud Sealing Kit 2.0m
U22002	Tilebud Sealing Kit 2.5m
U22003	Tilebud Sealing Kit 3.2m
U22004	Tilebud Sealing Kit 3.8m

Plumbud



Tilebud





### CROSS LEVELING KITS

Cross leveling kits help you to achieve a perfect finish when tiling on any surface.

The clips interlock with the adhesive holding tiles together and prevents tiles from moving while drying. The wedges and clips are made from Polypropylene providing excellent tensile strength and hardness, optimising breakage when dry. Non-recycled Polypropylene is selected for its proven superior quality over standard recycled material.

Kits Include

- 200 Durable & Reusable Wedges
- 200 x 2mm Clips
- Heavy Duty & Reusable Pliers

#### Installment Instruction:

- Step 1** – Apply the clip underneath the tile
- Step 2** – Insert the wedge in the clip adjusting by hand
- Step 3** – Regulate the position of the pliers and the pressure of application
- Step 4** – Pressure the wedge until the tile is level (No need to squeeze excessively as the tile will level naturally when the wedge is inserted firmly)
- Step 5** – Allow the adhesive to dry
- Step 6** – Break the clip sideways with the wedge still inserted by using a rubber hammer

#### FEATURES & BENEFITS

- Ensures each tile is level with surrounding tiles
- Eliminates settling from shrinkage
- minimises the possibility of warping
- creates a lippage free surface
- makes installing large format tiles easier and can significantly reduce installation time.

#### LEVELLING KIT

Code	Description
U10027	Tile Leveling with Pliers & 2mm Clips (200 Kit)
U11031	Leveling Clip Wedges -300 Pack- Reuseable
U15706	Metal Pliers

#### TILE TRIMS

Code	Description
U66648	10mm Square Edge Matt Aluminium
U66649	12mm Square Edge Matt Aluminium
U66651	10mm Round Edge Matt Aluminium
U66652	10mm Square Edge Gloss/Chrome
U66653	12mm Square Edge Gloss/Chrome
U66655	10.5mm Round Edge Gloss/Chrome
U66656	Square Edge White PVC 10.5mm
U66657	Square Edge Cream PVC 10.5mm
U66658	Round Edge White PVC 6.5mm
U66659	Round Edge White PVC 8.5mm
U66660	Round Edge White PVC 10.5mm
U66661	Round Edge Cream PVC 8.5mm
U71841	10m Aluminium Expansion Joint 2.5Mtr
U71842	8mm Square Edge Chrome Polished
U71843	8mm Square Edge Chrome Matt
U72268	12.5mm Round Edge Chrome Aluminium

#### TILE SPACERS

Code	Description
U11028	Large Format Tile 1mm Tile Spacers (300 Pk)
U11029	Large Format Tile 2mm Tile Spacers (300 Pk)
U66663	Cross Spacers 1mm (300 Pack)
U66664	Cross Spacers 2mm (300 Pack)
U66665	Cross Spacers 3mm



# tubs&tiles

www.tubstiles.ie • info@tubstiles.ie  
090 6424000



## SHOWROOM LOCATIONS

**ATHLONE** Tel: 090 6472745  
Dublin Road, Athlone, Co Westmeath

**CORK** Tel: 021 4968148  
Unit 3, Eastgate Retail Park, Little Island, Cork

**DUBLIN KYLEMORE** Tel: 01 6202902  
Unit 74B, Kylemore Road, Dublin 10

**DUBLIN SANDYFORD** Tel: 01 2078010  
T4, Birch Avenue, Stillorgan Industrial Park, Sandyford

**ENNIS** Tel: 065 6844690  
Unit 2, Block F, Quin Road Business Park, Quin Road, Ennis, Co. Clare

**GALWAY** Tel: 091 752500  
21/22 Briarhill Business Park, Ballybrit, Galway

**KILKENNY** Tel: 056 7752752  
Dublin Road, Kilkenny

**LIMERICK** Tel: 061 318155  
Ballysimon Road, Limerick

**NAVAN** Tel: 046 9072880  
Old Dublin Road, Navan, Co Meath

**SLIGO** Tel: 071 9170325  
Duck Park, Sligo

**TRALEE** Tel: 066 7181800  
The Horan Centre, Tralee, Co Kerry

**WEXFORD** Tel: 053 9144871  
Unit 5, Kerlogue Business Park, Rosslare Road, Wexford