COB BAS C



Features:

- Flexi Tails •
- Metal Fixing Nut
- Ceramic Cartridge

Prod	uct	Certifications:




WRAS Cerificate No: 1503953 WRAS Expiry Date: 31/03/2020



For more products, visit our website: http://www.bristan.com



Specification						
Style:	Contemporary					
Product Type:	Bathroom Taps					
Main Construction Material:	Brass					
Mount Type:	Deck Mounted					
Handle Type:	Lever					
Connection Inlet:	M10 x 15mm Flexible Tails					
Number of Tap Holes:	1					
Valve/Cartridge Type:	35mm Ceramic Cartiridge					
Plumbing System Requirements:	All					
Working Pressure Range:	Min 0.3 Bar, Max 5.0 Bar					
Maximum Hot Water Temperature: °C	60					
Maximum Dynamic Pressure: (bar)	5					
Maximum Static Pressure: (bar)	10					
Flow Type:	Single					
Flow Rate: (I/min @ 3 bar)	43.5					
Isolation Included:	No					

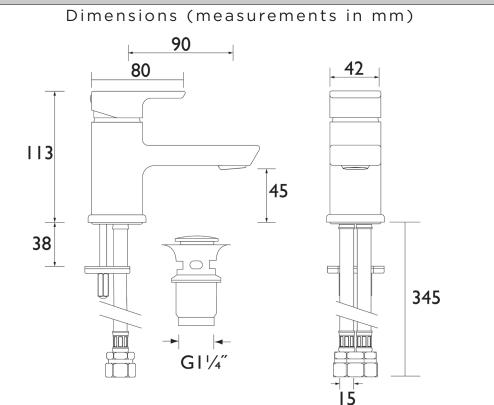

西洋海豚	Flow Rates (l/min)							
	System Pressure (bar)	0.2	0.5	1	2	3	5	
	COB BAS C	5.2	8.3	11.6	16.7	20.6	26.5	
TECHNICAL DATA SHEET	VEARS TRANSPORT		B	RIS	TAPS 8	AN 8 showe	RS D4	

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.