


## TECHNICAL FEATURES

|                                                                            |
|----------------------------------------------------------------------------|
| MODEL: <b>VINTAGE BLACK</b>                                                |
| SIZE: <b>45x45</b>                                                         |
| THICKNESS(mm):                                                             |
| DATE: <b>26/10/2022</b>                                                    |
| CODE: <b>015.302.0157.09165</b>                                            |
| GROUP: <b>GROUP B1a UNE-EN 14411 Annex G / SASO ISO 13006:2018 Annex G</b> |
| TILE TYPE: <b>GL</b>                                                       |
| FINISH: <b>MATT</b>                                                        |
| FAMILY: <b>COMPACGLASS-GLAZED PORCELAIN TILES</b>                          |
| NUMBER OF DESIGNS:                                                         |

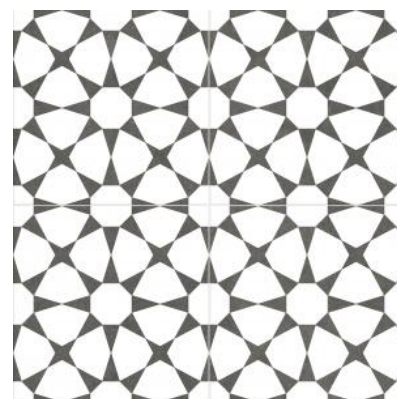

| TEST                |                                                   | RESULT                                              |
|---------------------|---------------------------------------------------|-----------------------------------------------------|
| UNE-EN ISO 10545-2  | DIMENSIONAL FEATURES                              | COMPLIES WITH THE STANDARD                          |
| UNE-EN ISO 10545-3  | WATER ABSORPTION                                  | $\leq 0,5 \%$                                       |
| UNE-EN ISO 10545-4  | MODULUS OF RUPTURE                                | 1600-2400 N                                         |
|                     | BREAKING STRENGTH                                 | 35-45 N/mm <sup>2</sup>                             |
| UNE-EN ISO 10545-6  | RESISTANCE TO DEEP ABRASION (MM <sup>3</sup> )    | NOT APPLY                                           |
| UNE-EN ISO 10545-7  | RESISTANCE TO SURFACE ABRASION                    | PEI IV                                              |
| UNE-EN ISO 10545-8  | LINEAR THERMAL EXPANSION                          | $<7,0 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$ |
| UNE-EN ISO 10545-9  | THERMAL SHOCK RESISTANCE                          | RESISTS                                             |
| UNE-EN ISO 10545-11 | CRAZING RESISTANCE                                | RESISTS                                             |
| UNE-EN ISO 10545-12 | FROST RESISTANCE                                  | RESISTS                                             |
| UNE-EN ISO 10545-13 | CHEMICAL RESISTANCE - AMMONIUM CHLORIDE 100 G/L   | A                                                   |
|                     | CHEMICAL RESISTANCE - SODIUM HYPOCHLORITE 20 MG/L | A                                                   |
|                     | CHEMICAL RESISTANCE - HYDROCHLORIC ACID 3%        | COMPLIES WITH THE STANDARD                          |
|                     | CHEMICAL RESISTANCE - CITRIC ACID 100 G/L         | COMPLIES WITH THE STANDARD                          |
|                     | CHEMICAL RESISTANCE - POTASSIUM HYDROXYDE 30 G/L  | COMPLIES WITH THE STANDARD                          |
| UNE-EN ISO 10545-14 | STAIN RESISTANCE - GREEN AGENT IN LIGHT OIL       | 5                                                   |
|                     | STAIN RESISTANCE - IODINE SOLUTION IN ALCOHOL     | 5                                                   |
|                     | STAIN RESISTANCE - OLIVE OIL                      | 5                                                   |

## SLIP RESISTANCE

| TEST              |                                                            | RESULT |
|-------------------|------------------------------------------------------------|--------|
| UNE 41901:2017 EX | SLIP RESISTANCE (PENDULUM)                                 | -      |
| DIN 51130         | CRITICAL ANGLE OF SLIP (INCLINED PLATFORM)                 | R10    |
| DIN 51097         | CRITICAL ANGLE OF SLIP. WET-LOADED BAREFOOT AREAS          | B      |
| (PTV) DRY         | CLASSIFICATION ACCORDING TO PENDULUM TEST VALUES (PTV) DRY | -      |
| (PTV) WET         | CLASSIFICATION ACCORDING TO PENDULUM TEST VALUES (PTV) WET | -      |
| ANSI A326.3       | DYNAMIC COEFFICIENT OF FRICTION (DCOF) OF RIGID FLOORS.    | -      |

| TEST               | VALOR UPEC |
|--------------------|------------|
| UPEC CERTIFICATION | -          |

## Declaration of Performance:

[https://www.pamesa.com/ERP/4.0/empresas/151/045/ficheros/t00030006/113/DdP\\_DoP\\_N003CPR2013.pdf](https://www.pamesa.com/ERP/4.0/empresas/151/045/ficheros/t00030006/113/DdP_DoP_N003CPR2013.pdf)

TECHNICAL DEPARTMENT  
PAMESA CERÁMICA