VERTICOTAP Shower Range VR SHXDIVFF C VerticoThermostatic Exposed Bar Valve with Rigid Riser and Integral Diverter to Handset Chrome



Features:

- 15mm inlet connections
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-ridden to a maximum of 46°C
- Dual control flow and temperature are controlled separately
- Automatic shut-off in the event of hot or cold water supply failure
- Supplied with a wall mount 12 fixing kit for easier first fit

Product Certifications:




For more products, visit our website: http://www.bristan.com



Specification				
Style:	Contemporary			
Finish/Colour:	Chrome			
Main Construction Material:	Brass			
No of Controls:	2			
Shower Type:	Exposed			
Shower Head Type:	Fixed Head and Handset			
Valve/Cartridge Type:	Thermostatic			
Maximum Hot Water Supply Temperature °C:	80			
Maximum Static Pressure: (bar)	10			
Plumbing System Suitability:	All - Ideally Balanced			
Working Pressure Range:	Min. 0.5 Bar - Max. 5.0 Bar			
Connection Inlet:	15mm Compression			
Connection Outlet:	N/A			
Isolation Valve Included:	No			
Check Valve Included:	No			

Dimensions (measurements in mm)

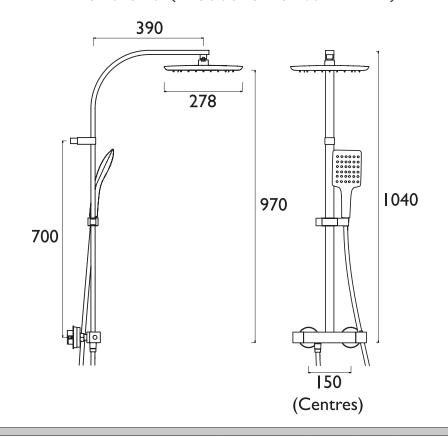

Flow Rates (I/min)							
System Pressure (bar)	0.2	0.5	1	2	3	5	
Through Handset (mixed)	1.8	3.3	5	7.1	8.8	11.6	

TECHNICAL DATA SHEET



BRISTAN